


Owiert kołnierza PN 10 PN-EN 1092-2	TEHACO®	Nr karty 6.8.2.
Długość zabudowy SZEREG 14 / F4 PN-EN 558-1 / DIN 3352/2	ZASUWA MIĘKKOUSZCZELNIONA typ RGV DANE TECHNICZNE	Średnice nominalne DN 40 – DN 300

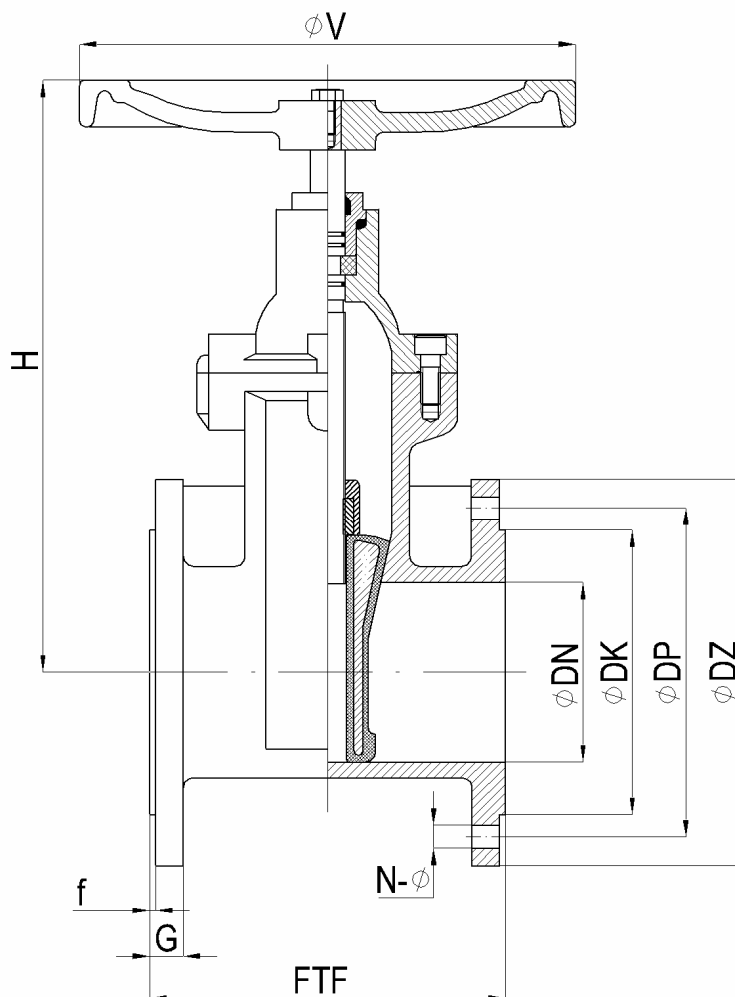

Rys. Zasuwa kołnierzowa typ RGV.

Tabela wymiarowa.

DN	Pr [MPa]	FTF [mm]	H [mm]	ØDP [mm]	ØDZ [mm]	ØDK [mm]	N-Ø	ØV [mm]	M [kg]
40	1,0	140	270	110	150	88	4-M16	160	9.8
50	1,0	150	292	135	175	102	4-M16	160	12.0
65	1,0	170	324	145	185	122	4-M16	160	15.0
80	1,0	180	360	160	200	138	8-M16	160	19.0
100	1,0	190	380	180	220	158	8-M16	200	24.5
125	1,0	200	454	210	250	188	8-M16	250	35.0
150	1,0	210	490	240	285	212	8-M20	250	45.3
200	1,0	230	578	295	340	268	8-M20	250	72.6
250	1,0	250	711	350	395/400*	320	12-M20	320	113.0
300	1,0	270	767	400	445/455*	378	12-M20	320	160.0

* dotyczy rur i łączników z żeliwa sferoidalnego.

TEHACO - edycja luty 2007
Producent zastrzega sobie prawo wprowadzania zmian konstrukcyjnych