


Owiewt kołnierza PN 10 PN-EN 1092-2	TEHACO®	Nr karty 6.8.3.
Długość zabudowy SZEREG 14 / F4 EN 558-1 / DIN 3352/2	ZASUWA MIĘKKOUSZCZELNIONA typ RGV DANE TECHNICZNE	Średnice nominalne DN 350 – DN 1000

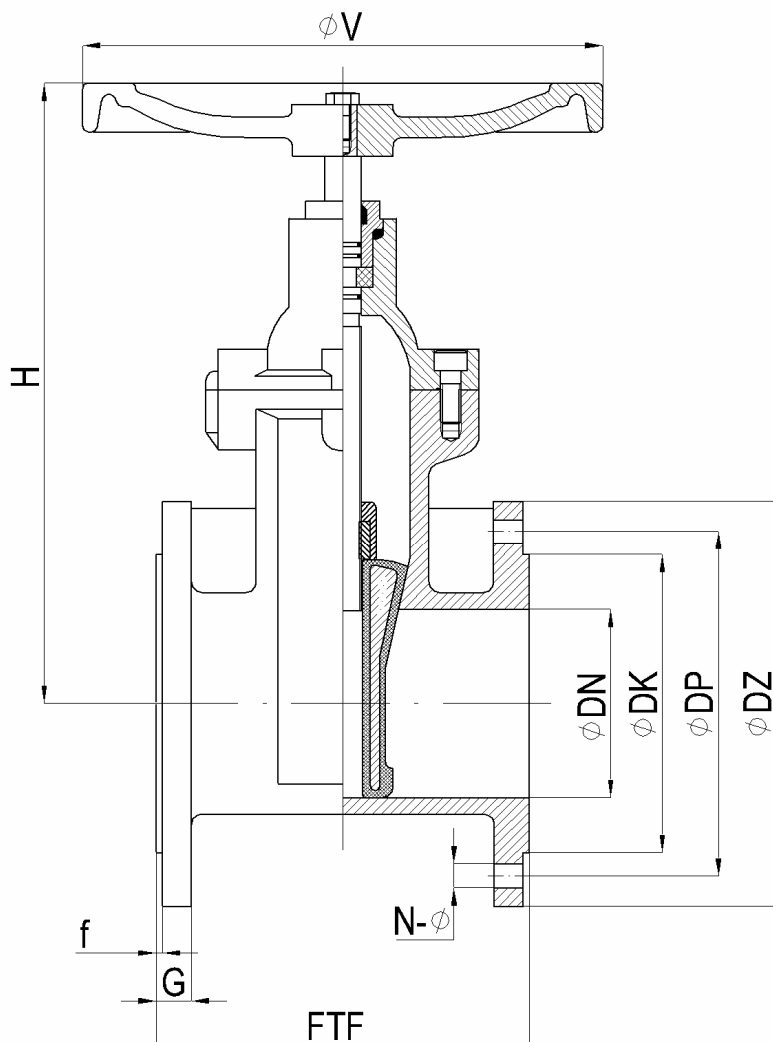

Rys. Zasuwa pierścieniowa typ RGV.

Tabela wymiarowa.

DN	Pr [MPa]	FTF [mm]	H [mm]	ØDZ [mm]	ØDP [mm]	ØDK [mm]	G [mm]	N-Ø	ØV [mm]	M [kg]
350	1,0	290	852	520	470	430	30	16- M27	400	290.0
400	1,0	310	945	580	515	490	28	16- M27	400	290.0
500	1,0	350	1140	715	620	610	32	20- M27	500	460.0
600	1,0	390	1320	840	725	725	36	20- M30	500	680.0
700	1,0	430	1500	910	840	800	40	24- M30	*	870.0
800	1,0	470	1710	1025	950	900	44	24- M33	*	1200.0
900	1,0	510	1840	1125	1050	1000	46	28- M33	*	1400.0
1000	1,0	550	-	1255	1160	1115	50	28- M36	*	

*wymagana przekładnia