

Owiewt kołnierza
PN 10
PN-EN 1092-2

TEHACO®


Nr karty
6.1.2.

Długość zabudowy
SZEREG 14 / F4
EN 558-1 / DIN 3352/2

ZASUWA PIERŚCIENIOWA typ TFG

DANE TECHNICZNE

Średnice nominalne
DN 40 – DN 900

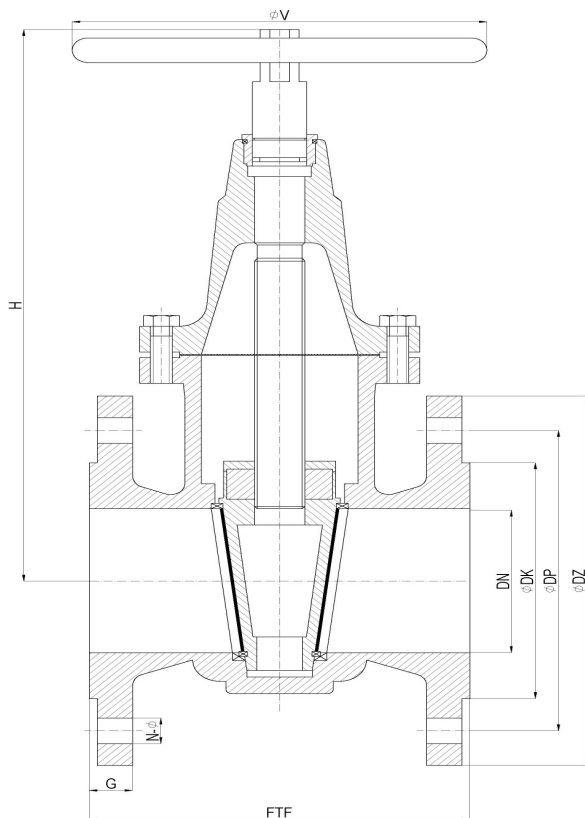

Rys. Zasuwa pierścieniowa typ TFG.

Tabela wymiarowa.

DN	Pr [MPa]	FTF [mm]	H [mm]	ØDZ [mm]	ØDP [mm]	ØDK [mm]	G [mm]	N-Ø	ØV [mm]	M [kg]
40	1,0	140	157	150	110	88	18	4-M18	160	8.6
50		150	190	165	125	102	20	4- M18		10.2
65		170	210	185	145	122		4- M18		14.4
80		180	230	200	160	138	22	8- M18		16.6
100		190	260	220	180	158		8- M18	200	22.6
125		200	365	250	210	188	24	8- M18	250	36.6
150		210	375	285	240	212		8- M23		44.2
200	0,6	230	500	340	295	268	26	8- M23	315	79.6
250		250	630	395	350	320	28	12- M23		123.0
300		270	715	445	400	370		12- M23		165.4
350	0,4	290	820	505	460	430	30	16- M23	400	225.0
400		310	910	565	515	482	32	16- M27		290.0
500		350	1135	670	620	585	34	20- M27		500
600	0,25	390	1300	780	725	685	36	20- M30	630	680.0
700		430	1480	895	840	800	40	24- M30		870.0
800	0,16	470	1690	1015	950	905	44	24- M33	800	1200.0
900	0,1	510	1820	1115	1050	1005	46	28- M33		1400.0

TEHACO - edycja luty 2008
Producent zastrzega sobie prawo wprowadzania zmian konstrukcyjnych