

Фланец PN 16 PN-EN 1092-2	ТЕНАСО®	№ карты 5.3.2.
Строительная длина L согл. таблице размеров	МЕШОЧНЫЙ КОМПЕНСАТОР типа SKK Размеры	Номинальные диаметры DN 25 – DN 250

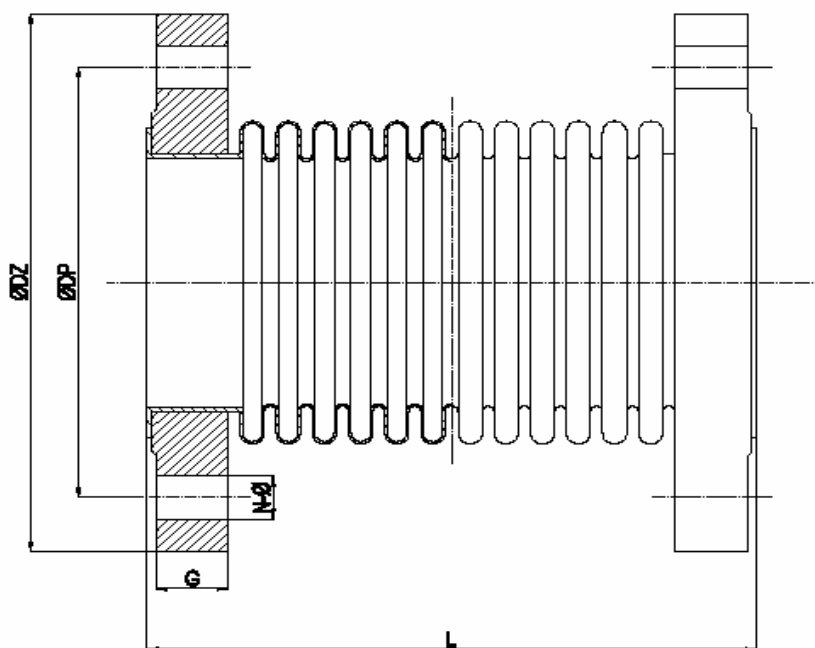


Таблица размеров:

PN	DN	Pr [МПа]	L [mm]	Ø DZ [mm]	Ø DP [mm]	N- Ø [mm]	G [mm]	Вес [кг]	компенсация	
									 - x [mm]	 + x [mm]
PN 16	25	1.6	120	115	85	4 x Ø14	16	1,4	10	20
	32	1.6	120	140	100	4 x Ø16	16	2,7	10	20
	40	1.6	120	150	110	4 x Ø18	16	3,6	10	20
	50	1.6	120	165	125	4 x Ø18	18	4,9	10	20
	65	1.6	120	185	145	4 x Ø18	18	6,1	10	20
	80	1.6	120	200	160	8 x Ø18	20	7,9	10	20
	100	1.6	120	220	180	8 x Ø18	20	8,3	10	20
	125	1.6	120	250	210	8 x Ø18	22	11,2	10	20
	150	1.6	130	285	240	8 x Ø22	22	13,9	10	20
	200	1.6	140	340	295	12 x Ø24	24	18,8	10	20
	250	1.6	140	405	355	12 x Ø26	26	25,6	10	20
PN 16	65	1.6	180	185	145	4 x Ø18	18	6,3	20	40
	80	1.6	180	200	160	8 x Ø18	20	8,1	20	40
	100	1.6	180	220	180	8 x Ø18	20	8,5	20	40
	125	1.6	180	250	210	8 x Ø18	22	11,5	20	40
	150	1.6	190	285	240	8 x Ø22	22	14,2	20	40
	200	1.6	200	340	295	12 x Ø24	24	19,2	20	40
	250	1.6	200	405	355	12 x Ø26	26	26,3	20	40